

# ECOROTE

GREEN WIND ENERGY

**MODERN**  
WIND TURBINES  
AND HYBRID  
SYSTEMS



**Hipar** sp. z o.o.

[www.ecorote.com.pl](http://www.ecorote.com.pl)



**Hipar** sp. z o.o.

**Producer**  
Wola Rafałowska 191a k/Rzeszowa  
**POLAND**  
tel.: +48 17 230 49 00  
e-mail: [biuro@hipar.pl](mailto:biuro@hipar.pl)  
[www.ecorote.com.pl](http://www.ecorote.com.pl)



AUTHORIZED DISTRIBUTOR





## SCIENTIFIC POTENTIAL + TECHNOLOGY PARK = SUCCESS

**HIPAR Sp. z o.o.** was created in 2004. The registered office of the Company is in Wola Rafałowska. At the beginning the main object of the Company operations was machining of steel and cast iron elements. Since 2006 the main products of the Company have been pulleys to Volkswagen motors. At that time the Company became a supplier of the pulleys for the production lines of new motors.

Since 2015 **Hipar Sp. z o.o.** has also manufactured equipment for independent operation of power plants outside of the power grid. Among other things, the Company offers innovative vertical axis wind turbines (VAWT) and photovoltaic trackers enabling the generation of 45% more energy from the PV panels compared to the stationary system.

**Hipar** as a production-trade enterprise provides an individual approach to each customer, adapting all its offered products to customer needs and environmental conditions i.e.: the geographical location, insolation, landform, level of the average wind speed which makes it an unmatched company in comparison to other companies.



**100%**  
Polish products

## THE ADVANTAGES OF OUR WIND TURBINES

ECOROTE Wind Turbines Line It is our flagship product. We produce turbines with power ratings from 300W to 9800W.

ECOROTE turbines have been developed by our team of designers and constructors in close cooperation with the Rzeszow University of Technology's flagship research institution specializing in Aviation.

**15** years  
on the market


- Operation independent on the wind direction
- Resistance to strong wind
- Simple mechanical construction enabling failure-free operation
- Durability
- No overhauls required
- Possibility to operate in On-Grid /Off-Grid/Hybrid systems
- Simple installation at hotels, shops, blocks of flats, production halls and other buildings
- High manufacturing quality
- Aesthetic appearance
- High strength
- Possible operation at temperatures ranging from -40°C to +70°C
- Resistance to any weather conditions
- Water heating
- Polish engineering and manufacturing
- Silent operation
- Low starting speed – approx. 1 m/s
- Service-free operation
- Absence of friction devices
- High quality of the applied materials
- No detrimental impact on the environment





# THE ADVANTAGES OF TURBINE CONSTRUCTION

A wind turbine allows for processing 71% (0.42 of Betz number) of wind energy into electricity. 98% of materials of which our products are made come from Polish manufacturers. Disc generator that converts the kinetic energy of wind into electricity has been developed so as not to have friction elements, by which it excludes maintenance. The blades of the turbine, thanks to the use of extruded aluminum profile of seamless monolith construction, are characterized by resistance to thermal expansion caused by heat. In addition, a white, sunlight reflecting paint, of C5+M resistance class is applied on the turbines. In addition, steel elements are galvanized and aluminum elements are anodized in order to ensure their effective corrosion protection.

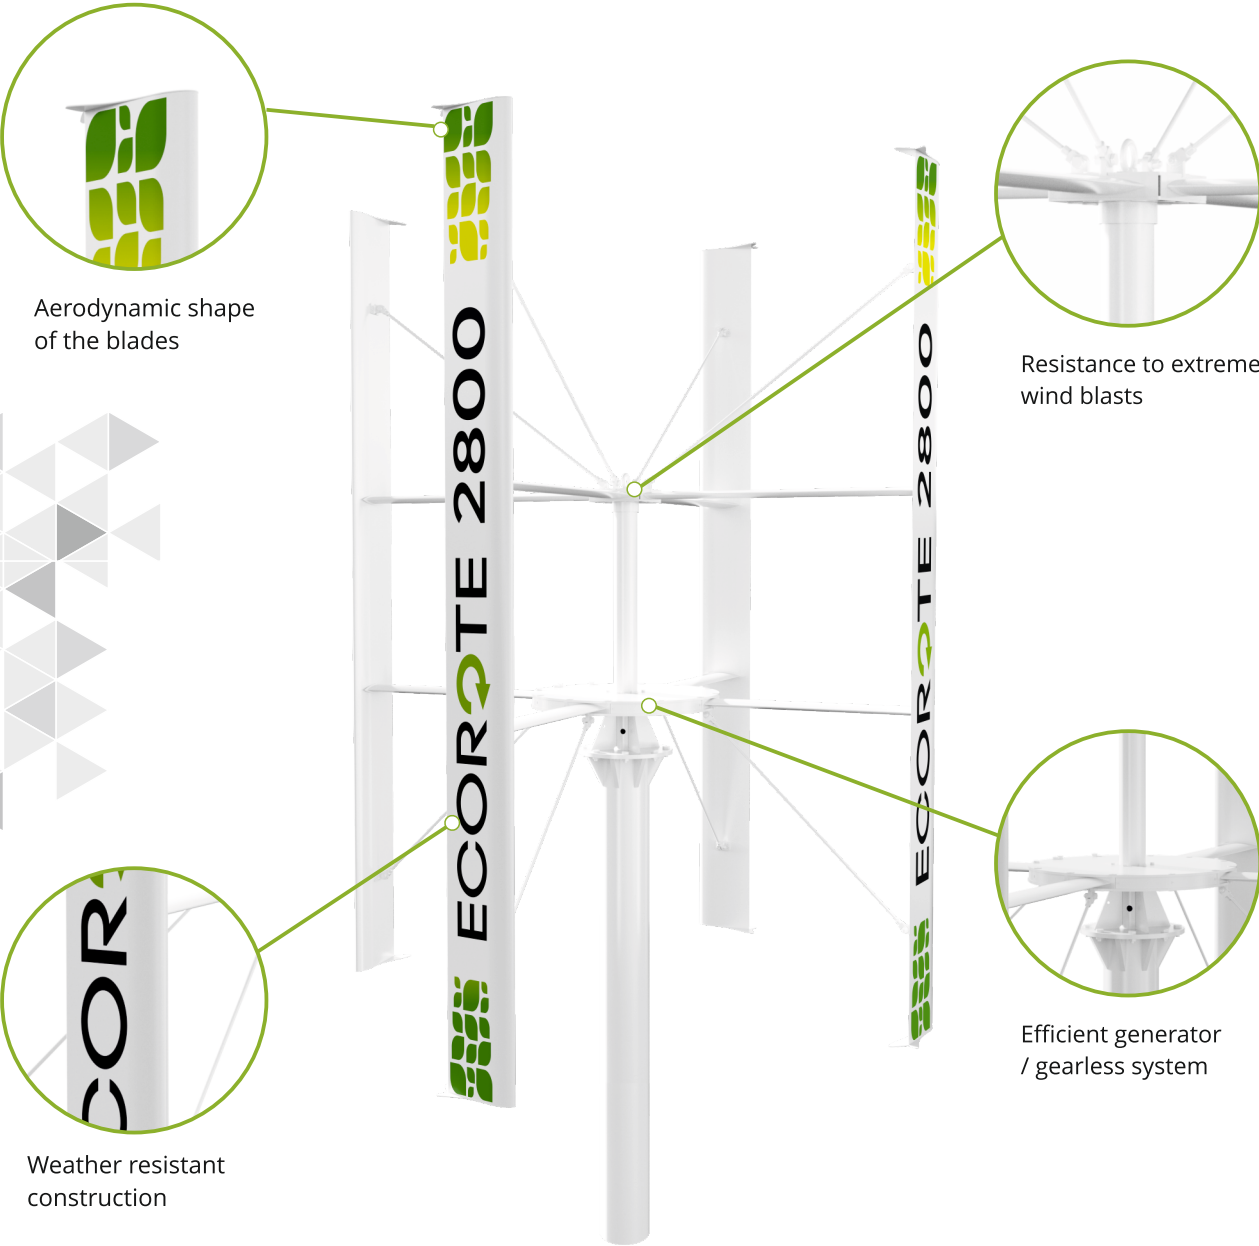


# TURBINE PARAMETERS

Nazwa Turbiny	ECOROTE 300	ECOROTE 1000	ECOROTE 1500	ECOROTE 2800	ECOROTE 9800
Turbine power	300W	1000W	1500W	2800W	9800W
Impeller diameter	1	1	2,2	2,2	4,3
Turbine height	1,2	2,17	1,5	3	5,6
Starting speed	2m/s	2m/s	1,5m/s	1,25m/s	1,2m/s
Rated speed	10m/s	12m/s			
Cut-in wind speed	3m/s				
Total weight	48 kg	52 kg	155 kg	175 kg	550 kg
Wings and arms	Aluminium structure with resistance tested in extreme conditions				
Brake	Electromagnetic		Electromagnetic & electromechanical		
Operation system	Off-Grid/Hybrid		On-Grid/Off-Grid/Hybrid		
Controller	Microprocessor				
Inverter output voltage	24/48/96V DC		1x230V AC / 3x230V AC 50Hz		
Number of inverter phases	1		1 or 3		3
Generator output voltage	AC				
Noise level acc. to PN-EN 61400-11	< 46 dB at 8m/s in the distance of 60m				
Operating temperature	from -40°C to + 70°C				
Corrosion protection	Anodized, galvanized, powder coated C5+M				
Mast types	Concrete posts, metal posts, lattice work and roof platforms				
Mast sizes	From 2m to 25m				
Compliance with standards	CE,IEC 61400-2, 61400-11				



# USE OF TURBINES

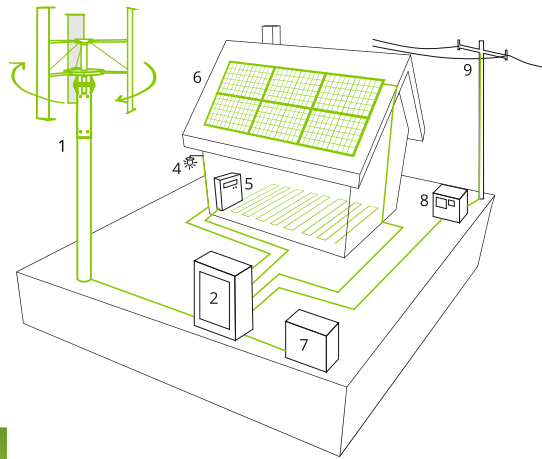


## 1. On-grid system/ On-grid hybrid system

a solution usually applied when a building is connected to power engineering network. It is one of the simplest systems consisting of a wind turbine of any capacity, grid inverter of the output voltage of 1 x 230 V AC or 3 x 230 V A, two-directional meter to measure the power generated and consumed, security measures in the form of circuit breakers and surge arresters, turbine stopping resistor and connection to the power grid. On-Grid systems may also be developed for photovoltaic modules, thus creating Hybrid systems. Moreover, batteries saving surplus power may be installed. In case of frequent power failures from the grid, the system may be additionally provided with a diesel generator. An On-Grid system enables the use of directly generated power and resale of the power in case of energy surpluses or accumulation in the power grid.


## 2. Off-grid system / Off-grid hybrid system

a perfect solution for buildings which are not connected to the power grid, e.g. recreational houses, or in case the house residents wish to be completely independent of the energy suppliers. The system is identical as the On-Grid one but the battery is a must in order to store the surplus of the energy generated. The system does not have to be connected to the power grid, so there is no need for a two-directional meter. The system may be extended for photovoltaic panels and diesel generator, identically as in the case of an On-Grid system. Both solutions have their advantages and disadvantages. An On-Grid system is supplied by the power from the grid, so at the moment of power failure in the grid the electric equipment in the house does not operate (except for the case when a diesel generator is additionally installed). An Off-Grid system is connected to batteries, so there is no fear of power failure. The latter system is more expensive and there is no possibility to resale the generated power to the grid.

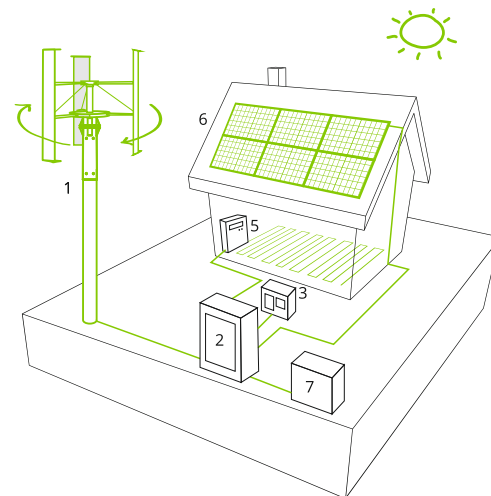

## 3. On/off-grid system / On/off-grid hybrid system

a solution combining the advantages of On-Grid and Off-Grid systems. An On/Off-Grid system removes the problem of power failure, usually as a result of weather anomaly, power grid repair, etc. The system first of all accumulates surplus energy in batteries and uses the accumulated energy when the wind turbine combined with the additional photovoltaic panels are not generating enough energy, or uses the batteries in case of complete grid failure. The battery of specific capacity takes missing energy from the power grid through the system controlling inverter as soon as the battery has been completely discharged. The system may also output energy to the grid when the batteries are fully loaded and the energy generated by the wind turbine and the photovoltaic panels is sufficient for the building supply.

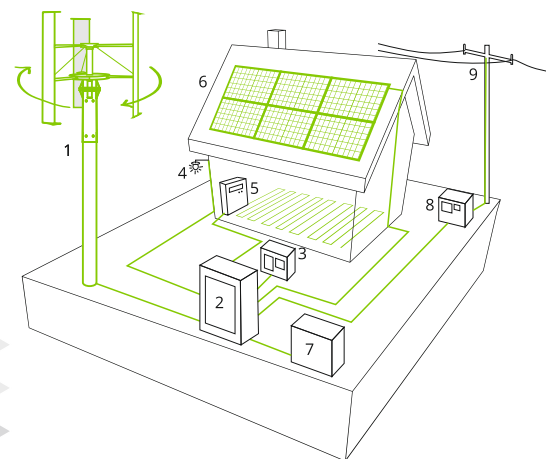


### Legend

- |   |                               |                       |                   |                                       |
|---|-------------------------------|-----------------------|-------------------|---------------------------------------|
| 1. Ecorote wind turbine                     | 2. Inverter/hybrid controller | 3. Batteries          | 4. 230V receivers | 5. Water heater / hot water / heating |
| 6. Photovoltaic panels (in a hybrid system) | 7. Generator (optional)       | 8. Switch /AC counter | 9. Network        |                                       |

# TYPES OF MASTS


## PRE-STRESSED MAST

are made by concrete pouring into a rotating conical mould, which ensures high technical parameters and smooth surface. The masts are characterised with long-lasting operation and durability. They are cheaper than other masts of similar heights. An attachment with platform for turbine installation is needed for a pre-stressed mast.

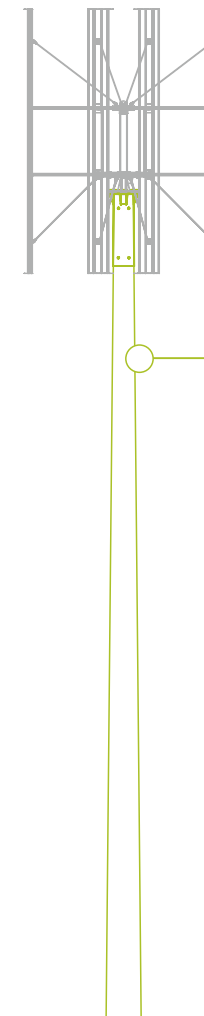


## STEEL MAST WITH CABLE STAYS

are made of combined thin-wall tubes. Lightweight construction and the possibility of the mast disassembly into short sections ensure comfortable transport. The stays fixed to concrete anchors balance the stress that may be present. The turbine is mounted directly on the mast, without any additional attachments.

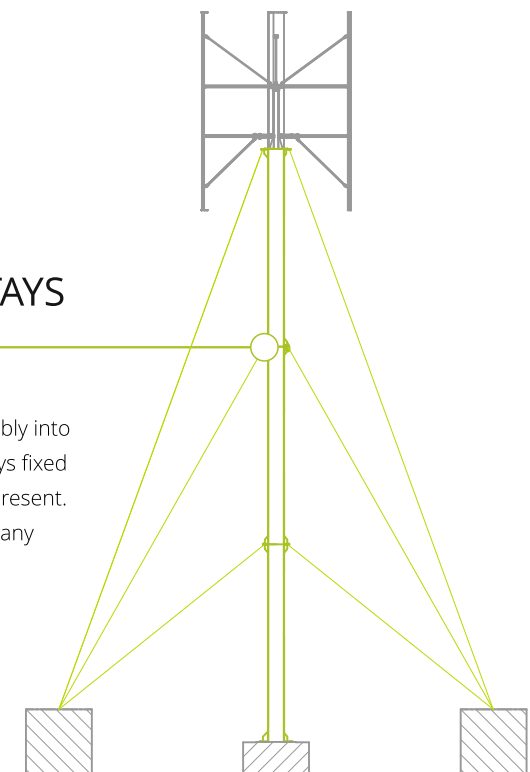

## FLAT-ROOF MAST

have the form of latticework of large span between the legs, which ensures stability and durability of the structure. It is possible to design a mast which does not reach higher than three metres above the roof. Four structure elements ensure simple transport, installation and dismantling. On flat roofs two vibration damping connectors are additionally applied in order to minimise the vibrations transferred to the building.

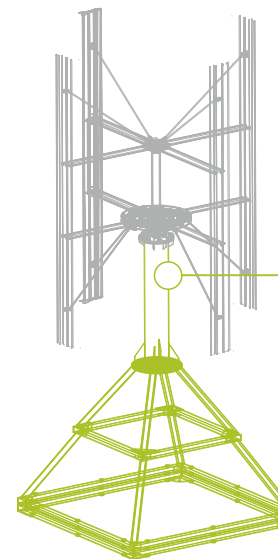



## REALIZATION SAMPLES



## PV TRACKERS

(follow-up systems)



### Created for maximum use of solar energy

PV trackers (follow-up systems) are devices that increase the efficiency of a photovoltaic system by up to approx. 45% per year, by reducing the losses resulting from the sunlight angle. The movement of the panels prevents the deposition of dust and other contaminants that can cause the effect of local overheating of the panels. The follow-up system increases productivity of inverters that control the process of electricity generating from sunlight. The inverters work best at a high load, which is obtained only by using the follow-up systems. Through the use of wind and snow/ice sensors in the control automation, we protect the tracker against adverse weather conditions.

### PERFECTLY PRODUCED

The structure is entirely made of steel and aluminum, it is driven by two German K + G cylinders and coronary transmission designed for reliable operation in extreme weather conditions.

Hipar's offer includes trackers from

**3000W to 8000W**



## Advantages of the PV trackers produced by us include, e.g.:



Our wind turbines produce energy in Poland and many other countries around the world:

Belgium  
Germany  
Ireland  
Norway  
Slovakia  
Brazil  
Azerbaijan  
Bulgaria

## BEST QUALITY of products

Wind Turbines and Trackers produced by our company are of the utmost quality. This is confirmed by the strength and agility results carried out by:



Polish Academy of Sciences, which placed our turbine in the Polish Antarctic Station at the South Pole (wind speed reaches up to 71 m / s)



Our turbines and trackers have been evaluated as products with unparalleled performance and parameters by independent research units. With a specialized technical and design personnel and over 20 years of experience in the mechanical industry our company, in addition to production of turbines and tracker, deals with the automotive industry used by companies such as Volvo, Volkswagen, Mercedes, BMW, Festo, Caterpillar and many others.

